



# INTRABOX DATA PROX

Secure access control

INTRABOX



**INTRABOX Data Prox:** 1 flush fit square proximity reader (04-0106) + 1 relay card (12-0110) + 1 transmission module unlimited data and syncing for 10 years (06-0131).

- No need for a programmer
- Create, change or delete key fobs without recovering them
- Stainless steel finish

SQUARE PROXIMITY READER 04-0106



Data



Vandal resistant



Accessible for all



Remote online management  
www.intratone.info

NO NEED FOR A PROGRAMMER

Functions	
Free access time slots	Yes
Log events	Yes
Compatible with key fobs and remote transmitters equipped with MIFARE technology	Yes
Maximum number of key fobs / master key fobs	10,000
Technical alerts (emails)	✓

## TECHNICAL SPECIFICATIONS

### Power supply

min. 12/24 V DC - 2 A

### Wiring

Relay card - reader  
4 wires (2 twisted pairs)  
Ø 8/10e - Max: 200m  
Relay card - GPRS unit  
4 wires (2 twisted pair)  
Ø 8/10e - Max: 200m


### Dimensions (L x H x D)

Reader 32 x 42 x 18mm  
Relay card 74 x 59 x 18mm  
GPRS unit 162 x 96 x 53mm  
Read head (with cover)  
64.5 x 62 x 23mm  
Read head only Ø 40 x 40mm  
Reader (bare) 62 x 62 x 23mm

### Environment

Reader operating temperature  
-20°C to +70°C  
Reader storage temperature  
-20°C to +70°C  
Reader protection class IP50

## SIMPLIFIED SCHEMATIC

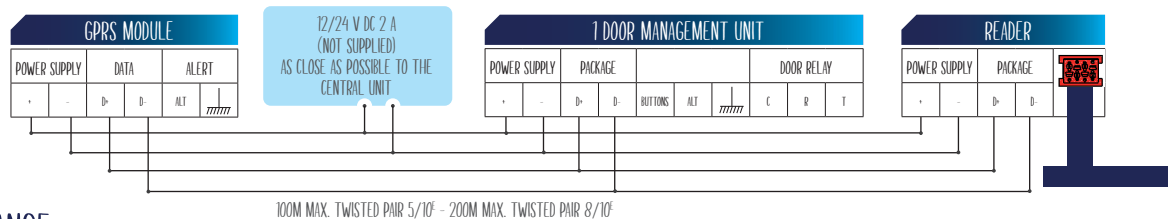

## RANGE

### Products

06-0143	Intrabox Data Prox: 2 flush fit square proximity readers (04-0106) + 2 door controller for 2 doors (03-0101) + 1 transmission module unlimited data and syncing for 10 years
06-0131	Intrabox Data Prox: 1 flush fit square proximity reader (04-0106) + 1 relay card (12-0110) + 1 transmission module unlimited data and syncing for 10 years

### Accessory

12-0132	Surface mounted box for square reader - surface mounted - stainless steel finish (125.5 x 125.5 x 57mm)
12-0135	Box for square reader - flush-fit - stainless steel finish (90.4 x 90 x 37mm)